


**MARK T. PORTER**  
*Superintendent of Schools*

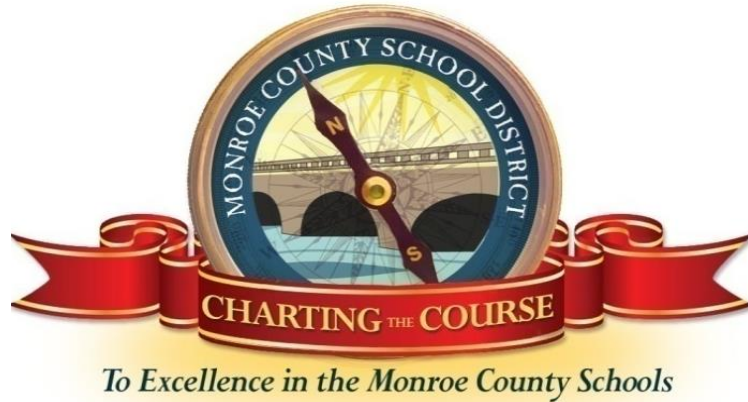

**Members of the Board**

*District # 1*  
**BOBBY HIGHSMITH**  
*Vice-Chairman*

*District # 2*  
**ANDY GRIFFITHS**

*District # 3*  
**MINDY CONN**

*District # 4*  
**JOHN R. DICK**  
*Chairman*

*District # 5*  
**RONALD A. MARTIN**

**Bid No: RFP 2017716**  
**Name of Bid: High School Auditorium Stage, Sound, and Lighting**  
**Post Date: 3/21/2017**  
**Notice Post Time: 4:30 PM**

**Addendum No.3**

The following are revisions to the drawings provided by Anston-Greenlees, Inc.:

1.1. Coral Shores High School – Refer to Drawing E0.2 – LUMINAIRE SCHEDULE:

- a. Change Luminaire “A” to read as follows:

6” HIGH LUMEN LED DOWNLIGHT, RJ45 CAT 6 DMX HIGH RESOLUTION DIMMING TO LESS THAN 0.1%, 60 DEGREE BEAM ANGLE, LIGHT ENGINE AND DRIVER ACCESSIBLE FROM BELOW, 5 YEAR WARRANTY. PROVIDE SLOPE CEILING ADAPTERS (FIELD VERIFY ANGLE REQUIRED). PROVIDE WHITE TRIM. PROVIDE ALL REQUIRED MOUNTING CHANNELS AND HANGERS.

2700 DEGREE, 85 CRI LED LAMPS. 100 WATTS, 8250 LUMENS AT 25 DEGREE BEAM, 120 VOLT\

METEOR LIGHTING CAT NO. RS6N-100W-2700K(CRI85)-120-DMX(RJ45)-60-WHT-SCA6XX

- b. Change Luminaire “B” to read as follows:

6” HIGH LUMEN LED DOWNLIGHT, RJ45 CAT 6 DMX HIGH RESOLUTION DIMMING TO LESS THAN 0.1%, 60 DEGREE BEAM ANGLE, LIGHT ENGINE AND DRIVER ACCESSIBLE FROM BELOW, 5 YEAR WARRANTY. PROVIDE SLOPE CEILING ADAPTERS (FIELD VERIFY ANGLE REQUIRED). PROVIDE WHITE TRIM. PROVIDE ALL REQUIRED MOUNTING CHANNELS AND HANGERS.

2700 DEGREE, 85 CRI LED LAMPS. 40 WATTS, 3215 LUMENS AT 25 DEGREE BEAM, 120 VOLT

METEOR LIGHTING CAT NO. RS6N-40W-2700K(CRI85)-120-DMX(RJ45)-60-WHT-SCA6XX

- c. Change Luminaire “C” to read as follows:

6” HIGH LUMEN LED DOWNLIGHT, RJ45 CAT 6 DMX HIGH RESOLUTION DIMMING TO LESS THAN 0.1%, 45 DEGREE BEAM ANGLE, LIGHT ENGINE AND DRIVER ACCESSIBLE FROM BELOW, 5 YEAR WARRANTY. PROVIDE SLOPE CEILING ADAPTERS (FIELD VERIFY ANGLE REQUIRED). PROVIDE WHITE TRIM. PROVIDE ALL REQUIRED MOUNTING CHANNELS AND HANGERS.

2700 DEGREE, 85 CRI LED LAMPS. 100 WATTS, 8250 LUMENS AT 25 DEGREE BEAM, 120 VOLT

METEOR LIGHTING CAT NO. RS6N-100W-2700K(CRI85)-120-DMX(RJ45)-45-WHT-SCA6XX

1.2. Key West High School – Refer to Drawing E0.2 – LUMINAIRE SCHEDULE:

- a. Change Luminaire “A” to read as follows:

6” HIGH LUMEN LED DOWNLIGHT, RJ45 CAT 6 DMX HIGH RESOLUTION DIMMING TO LESS THAN 0.1%, 60 DEGREE BEAM ANGLE, LIGHT ENGINE AND DRIVER ACCESSIBLE FROM BELOW, 5 YEAR WARRANTY. PROVIDE SLOPE CEILING ADAPTERS (FIELD VERIFY ANGLE REQUIRED). PROVIDE WHITE TRIM. PROVIDE ALL REQUIRED MOUNTING CHANNELS AND HANGERS.

2700 DEGREE, 85 CRI LED LAMPS. 100 WATTS, 8250 LUMENS AT 25 DEGREE BEAM, 120 VOLT\

METEOR LIGHTING CAT NO. RS6N-100W-2700K(CRI85)-120-DMX(RJ45)-60-WHT-SCA6XX

- b. Change Luminaire “B” to read as follows:

6” HIGH LUMEN LED DOWNLIGHT, RJ45 CAT 6 DMX HIGH RESOLUTION DIMMING TO LESS THAN 0.1%, 60 DEGREE BEAM ANGLE, LIGHT ENGINE AND DRIVER ACCESSIBLE FROM BELOW, 5 YEAR WARRANTY. PROVIDE SLOPE CEILING ADAPTERS (FIELD VERIFY ANGLE REQUIRED). PROVIDE

WHITE TRIM. PROVIDE ALL REQUIRED MOUNTING CHANNELS AND HANGERS.

2700 DEGREE, 85 CRI LED LAMPS. 40 WATTS, 3215 LUMENS AT 25 DEGREE BEAM, 120 VOLT

METEOR LIGHTING CAT NO. RS6N-40W-2700K(CRI85)-120-DMX(RJ45)-60-WHT-SCA6XX

- c. Change Luminaire "C" to read as follows:

6" HIGH LUMEN LED DOWNLIGHT, RJ45 CAT 6 DMX HIGH RESOLUTION DIMMING TO LESS THAN 0.1%, 45 DEGREE BEAM ANGLE, LIGHT ENGINE AND DRIVER ACCESSIBLE FROM BELOW, 5 YEAR WARRANTY. PROVIDE SLOPE CEILING ADAPTERS (FIELD VERIFY ANGLE REQUIRED). PROVIDE WHITE TRIM. PROVIDE ALL REQUIRED MOUNTING CHANNELS AND HANGERS.

2700 DEGREE, 85 CRI LED LAMPS. 100 WATTS, 8250 LUMENS AT 25 DEGREE BEAM, 120 VOLT

METEOR LIGHTING CAT NO. RS6N-100W-2700K(CRI85)-120-DMX(RJ45)-45-WHT-SCA6XX