


MARK T. PORTER
Superintendent of Schools

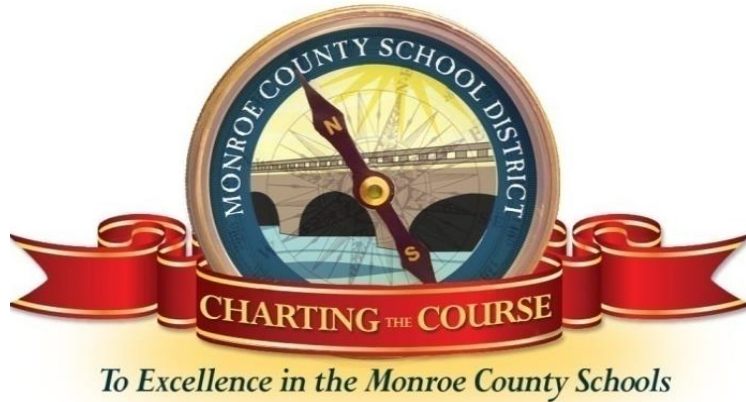

Members of the Board

District # 1
BOBBY HIGHSMITH
Vice-Chairman

District # 2
ANDY GRIFFITHS

District # 3
MINDY CONN

District # 4
JOHN R. DICK
Chairman

District # 5
RONALD A. MARTIN

Bid No: ITB 2017714
Name of Bid: Air Conditioning Replacement
Post Date: 3/14/2017
Notice Post Time: 8:00 AM

Addendum No.1

The following are revisions based on the mandatory pre-bid meeting held on March 7, 2017:

- Coral Shores High School
 - Unit 2-910 the new location is changed to be the same area as shown for unit 2-202. The district will provide two slabs for the units. The entire gravel area will be fenced by the contractor.
 - On unit 2-807 the contractor is to include the replacement of the hot water circulating pump located on the existing condensing unit (CU).
- Marathon High School
 - Unit MAU 3.1 tonnage is changed to 30 tons.
 - Units MAU 3.1 and CU 3.1.1A will be located on the existing slab behind the gym. The resized MAU 3.1 fits the existing slab.
 - Existing unit 5.2.1 – This contractor is to relocate the unit back to within 18” of the street side fence. Refrigerant lines and electrical service shall be rerouted in a chase under the sidewalk.
 - At the location of CU 5.2.1, MCSD will extend the slab 35’ to the north to allow the mounting of units MAU 5.1.1, MAU 5.1.2, and CU 5.1.2. Fencing shall be done to create one continuous enclosure. The CU units shall be located 18” from the new contractor provided fence on the street side of the slab. The control panels shall be located toward the sidewalk. The fenced enclosure on the control panel side shall be at 18” from the unit. Gates shall be provided at the control panel opening of each unit. When the project is completed the sidewalk will be cleared of fence, refrigerant lines, and electrical service. All shall be routed in a chase through the side walk.
 - Unit CU 5.2.2 shall be located on a new slab provided by MCSD to the north of unit CU 5.1.1. The slabs will be attached. This contractor is to fence as one enclosure.
- Sugarloaf Elementary School
 - For the bus driver’s office RTU add Rheem to the list equipment suppliers.
- All Sites

Purchasing | Property Control | Contracts | Records Management Divisions
AJ Henriquez Administrative Complex
241 Trumbo Road | Key West, FL 33040
305-293-1400
www.KeysSchools.com

- For all chases through sidewalks or drive ways – The contractor shall cover the chase with 1/4" galvanized diamond plate. The cover shall be secured with stainless steel tapcon screws.