


MARK T. PORTER
Superintendent of Schools

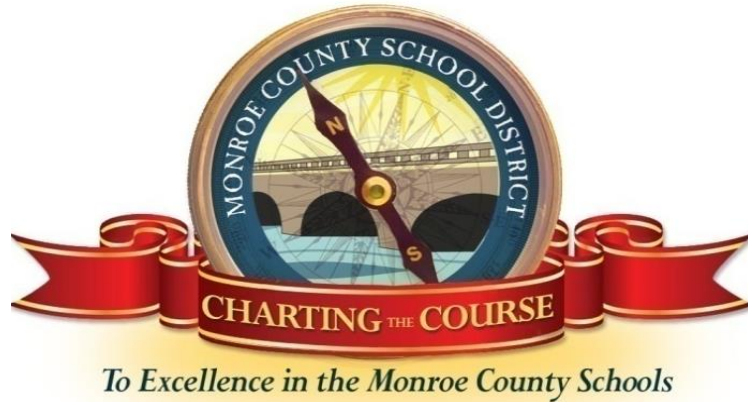

Members of the Board

District # 1
BOBBY HIGHSMITH
Vice-Chairman

District # 2
ANDY GRIFFITHS

District # 3
MINDY CONN

District # 4
JOHN R. DICK
Chairman

District # 5
RONALD A. MARTIN

Bid No: ITB 2017718
Name of Bid: Horace O'Bryant Bus Loop
Post Date: 4/19/17
Notice Post Time: 10:00 AM

Addendum No.2

The following are revisions based on submitted questions. Original drawings C-1, A-4, and A-5 should be replaced with updated versions. For informational purposes a Boundary Survey and Geophysical Investigation Map are included. All new or updated attachments are posted separately due to size.

1. Sheet A-5 Detail 3 appears to be missing dimensions and notes for the flashing details above the canopy. Please advise.
Response: See attached revised sheet.
2. Sheet S-1 does NOT show an ADA Ramp on the South Side of the Crosswalk leading from Concession Stand. Sheet A-4 shows this "Segment of Concrete Walkway to be Aligned with Adjacent Asphalt". Will this sloped walkway effect the elevation of the Canopy Footings and/or Canopy Columns?
Response: The walkway is to be sloped as per A-4. There are no ADA ramps in this project. Some walkways are sloped, but their slope and rise are too low to be considered ramps. The elevation of the canopy is to remain generally consistent. Post lengths may vary slightly based on grade or sidewalk elevation changes. Variations in post height should not exceed 6".
3. Addendum #1 response to item 5 reads "The concrete band is 34'-6" x 3'-0..." Please note the gate itself is 34' and the track is usually twice the gate length. Should this concrete band be 69'-0" long by 3'-0" wide by 12" thick?
Response: Yes
4. Regarding the scope of work to be included within Alternate #1, will the revised sidewalk layout shown on Detail 4 of Sheet A-6 NOT require a 6" Curb or Thickened Edge Sidewalk in front of the Basketball Hoops (between the Bus Loop and the Sidewalk)?
Response: A 6" concrete curb will be required as shown by the typical walkway section shown on S-1.